
Instrumentation, Measurement and Findings from the USDA-ARS Edge-of-Field Research Network

Kevin W. King USDA-Agricultural Research Service Soil Drainage Research Unit Columbus, OH



USDA-ARS edge-of-field network in Ohio

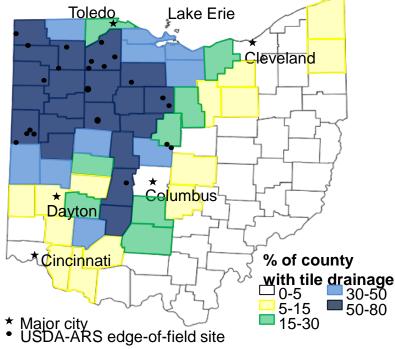

By the numbers

- 40 paired fields located on 20 farms
- ~90 automated Isco samplers
- Over 200+ site years of data (surface & subsurface)


Typical edge-of-field site




Williams et al. 2016. J. Soil Water Conserv. 71:9-12



Discharge

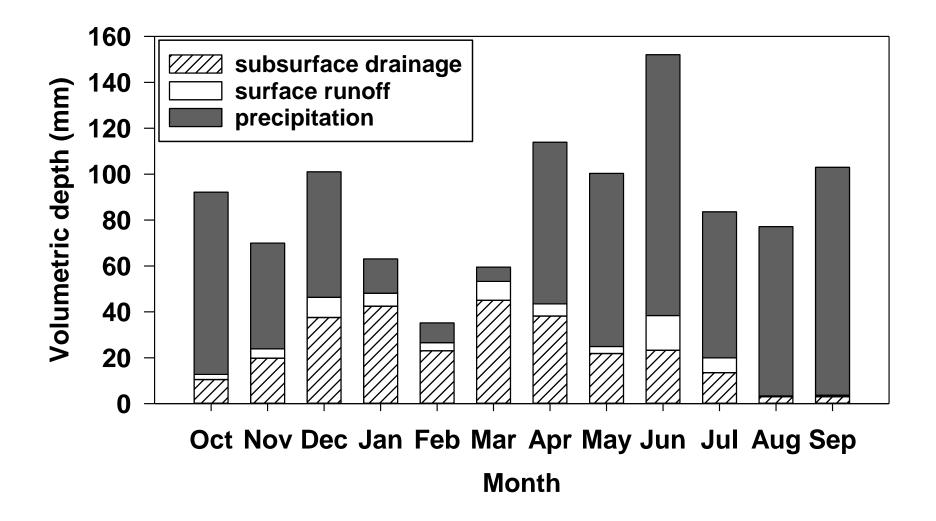




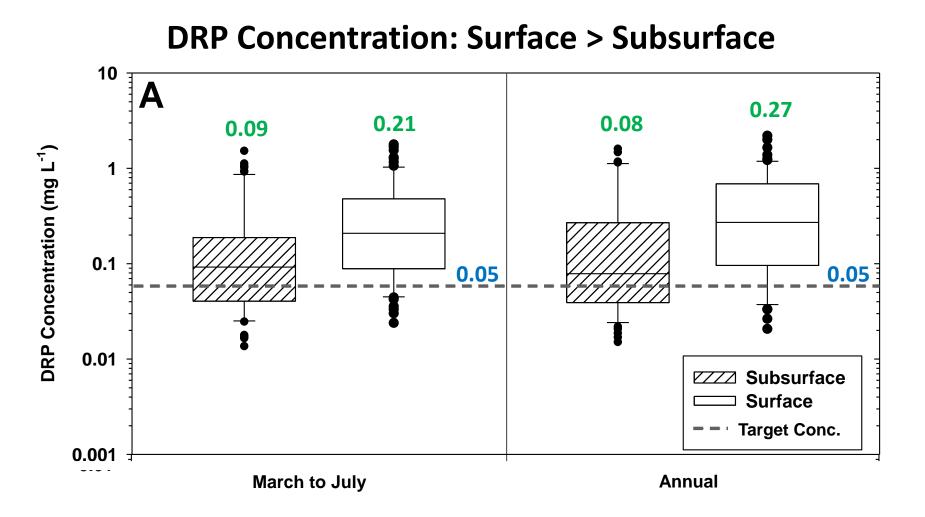




DRP Load: Subsurface > Surface

*If 40% load reduction was applied to entire Maumee Basin Watershed

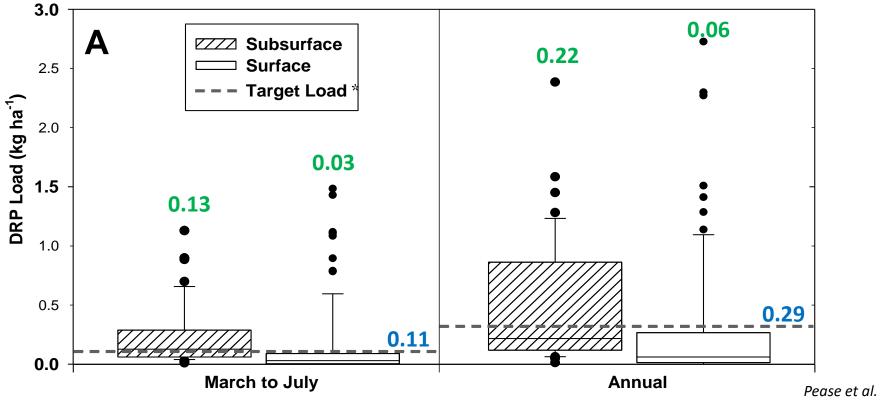

(2018)

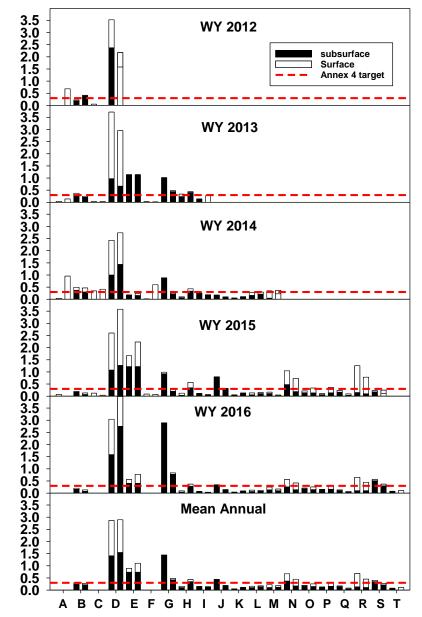


---- If 40% load reduction was applied to entire Maumee Basin Annual March-July 57% 43%


Meets targetExceeds target

73±26% of total DRP load was from tile drainage


Soil Test P vs Environmental Risk

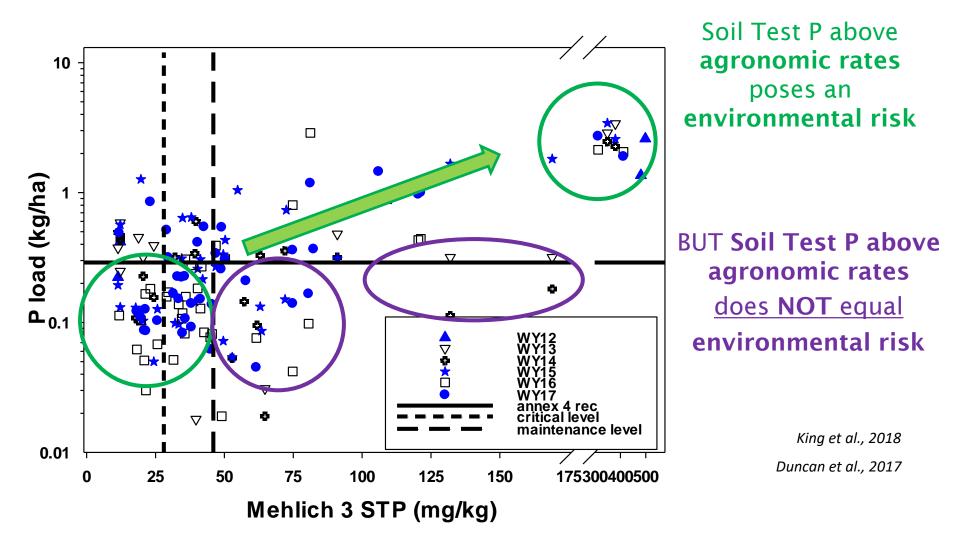

P balances

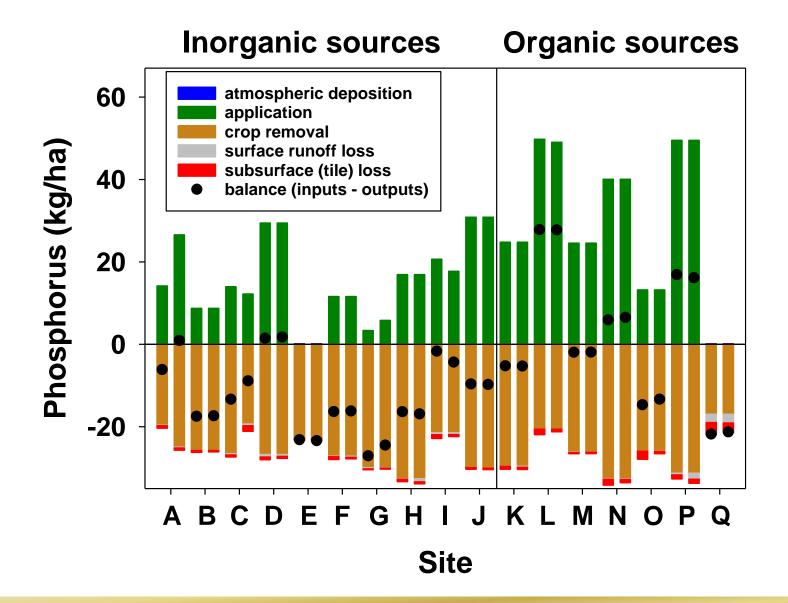

Weather plays a major role

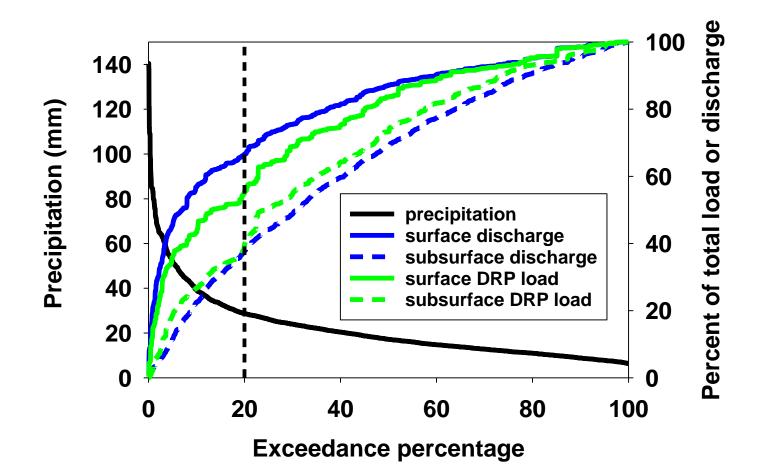



Precipitation and Discharge Volume

Statistical Analysis of Event Magnitude






Size of surface runoff events tied to the size of the rainfall event

Larger rainfall event = larger runoff event

Size of tile discharge event tied to antecedent conditions

Higher flows associated with:

- Consecutive rainfall events within 48-h
 Lower flows associated with:
- Single events and short duration events

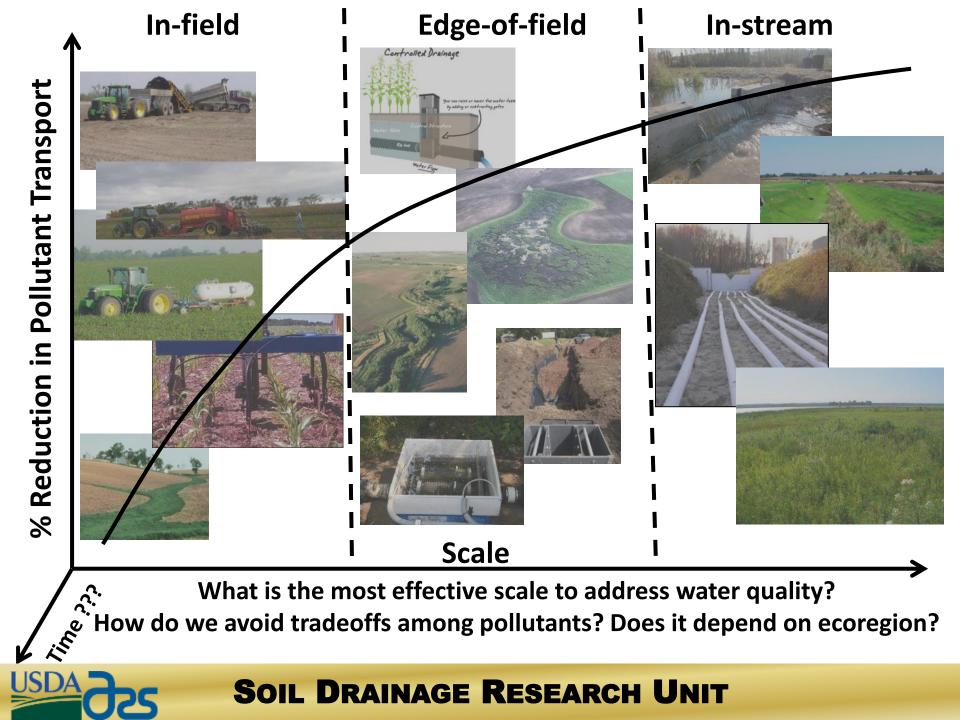

Treatment practices

In-field

- 4Rs (source, rate, time, placement)
 - Organic vs inorganic
 - Zero P, half-rate, full-rate
 - Fall vs spring
 - Surface vs subsurface
- Gypsum as a surface amendment
- Cover crop vs no cover crops


Edge-of-field

- Drainage water management
- Woodchip bioreactors and P filters

In-stream → Two-stage ditch design

Crop rotation

Fertilizer Source

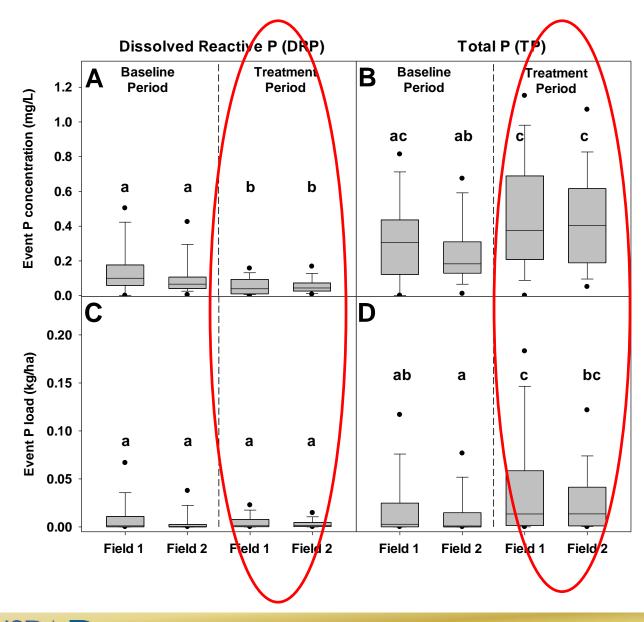


Field 1: Liquid dairy manure



Field 2: MAP




Ohio – Crop Rotation Application Rates

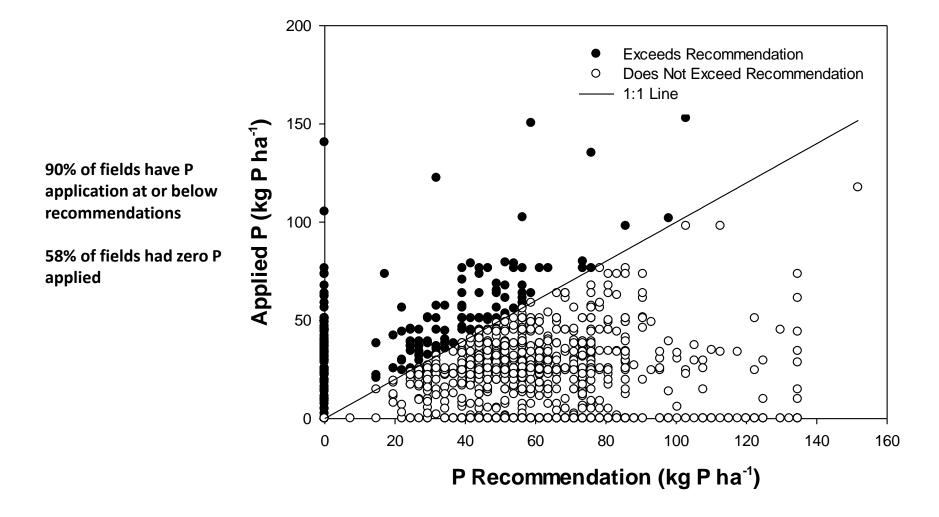

Provided by Doug Smith




P losses and time of application

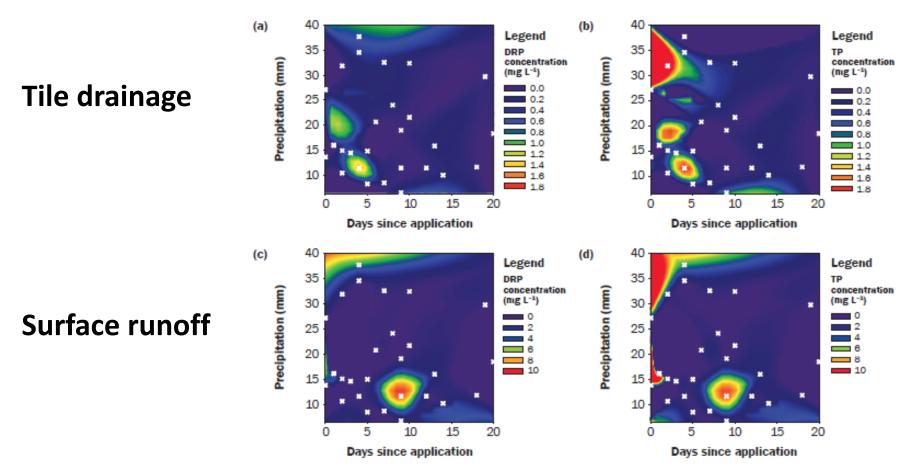

• Greater potential for losses when application is followed shortly by precipitation


King et al., 2018

Evidence of Preferential Flow

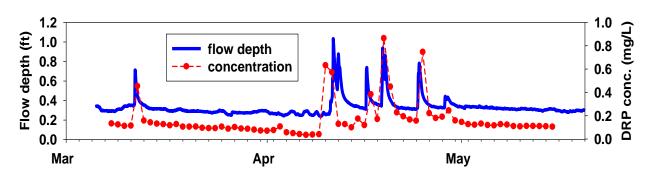


Positive correlation between peaks in P concentrations and tile discharge indicate fast flow processes (preferential flow) and connection to surface






P Stratification and management

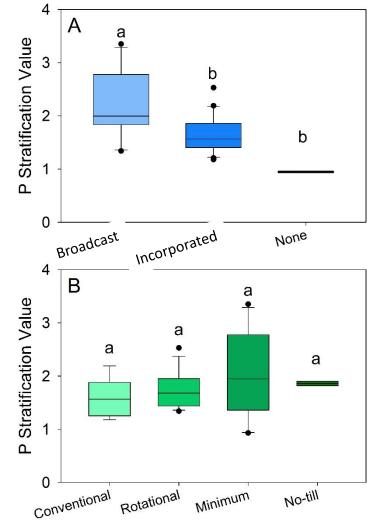



P losses and fertilizer placement

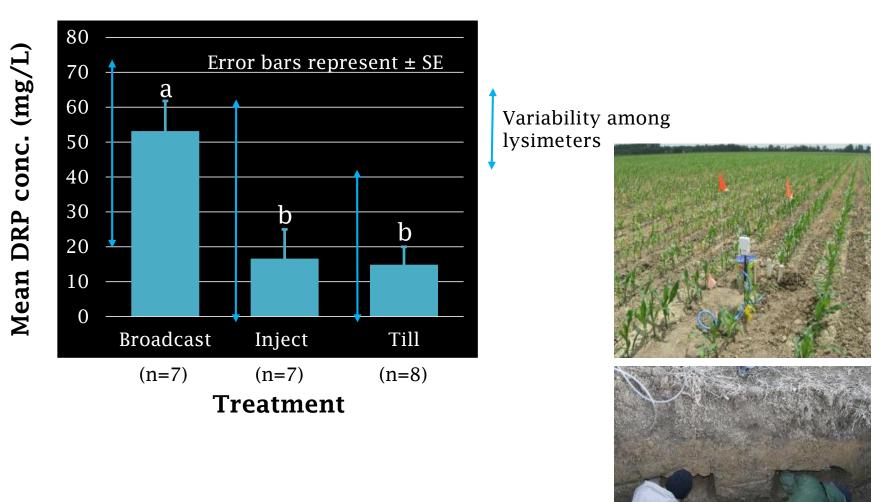

Williams et al., 2018



Cover/catch Crop x Rate study

Oct

Nov

Dec

Total

5.87

0.32

9.13

1.74

0.20

2.77

10.69

0.27

14.87

0.08

0.01

0.12

7/6/2017: 7000 gal/ac liquid dairy manure (15.3,5.4,13.5)

Mustard **No Cover Crop** Mustard **No Cover Crop Cover Crop Cover Crop** 7000 gal/acre 14,000 gal/acre MD4 **Precipitation Discharge NO3-N** DRP Discharge NO3-N DRP DRP **Discharge NO3-N** DRP Discharge NO3-N (inches) (inches) (lbs/ac) (lbs/ac) (inches) (lbs/ac) (lbs/ac) (inches) (lbs/ac) (lbs/ac) (inches) (lbs/ac) (lbs/ac) 2.94 0.84 3.92 0.04 0.20 1.16 0.00 0.25 1.07 0.00 0.09 0.32 0.00

7/31/2017: 7000 gal/ac liquid dairy manure (15.3,5.4,13.5)

Preliminary data suggests: Rate and cover crop have a significant impact on NO3-N tile drainage losses but no effect on DRP

0.01

0.00

0.01

1.34

0.04

2.54

1.83

0.05

2.12

0.02

0.00

0.02

1.19

0.20

1.48

20.49

0.06

21.62

0.01

0.00

0.01

1.60

0.00


1.92

0.70

0.08

0.98

Cover crops

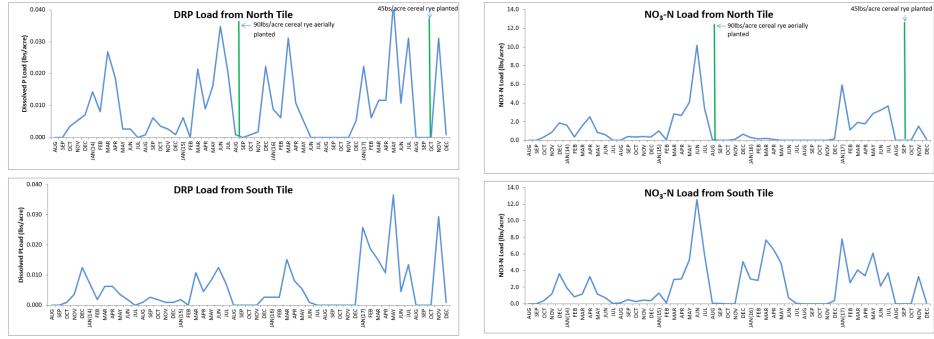





Ground Cover and Discharge Volume

Statistical Analysis of Event Magnitude





Grass-type crops associated with lower tile discharge

Includes corn, wheat, forage grasses, and grasstype cover crops

Ground cover had less of an effect on discharge anount than rainfall characteristics




Edge of Field Practices

Drainage Water Management (DWM)




USDA

DWM - Case Study

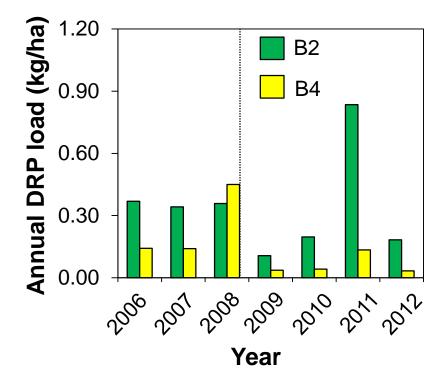

- B2 free drainage
- **B4 drainage water management**
 - Annual discharge reduction: 17% to 73% across sites 41% on average
 - Daily discharge reduction: 50% on average during management (*Gunn et al. 2015*)
- DWM did not significantly affect DRP concentration
- 8-40% reduction in annual DRP load with DWM

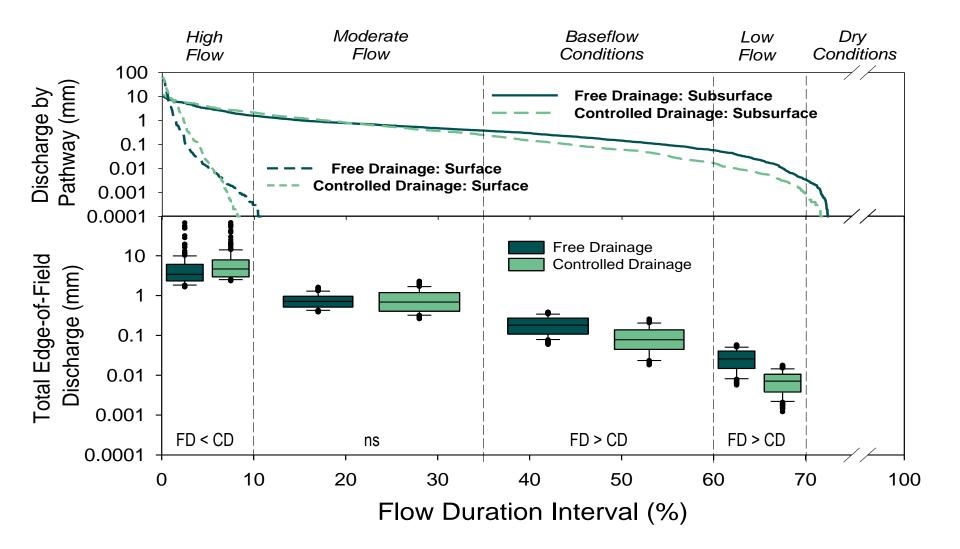


Phosphorus Removal Structures






DRP Concentration Reduction

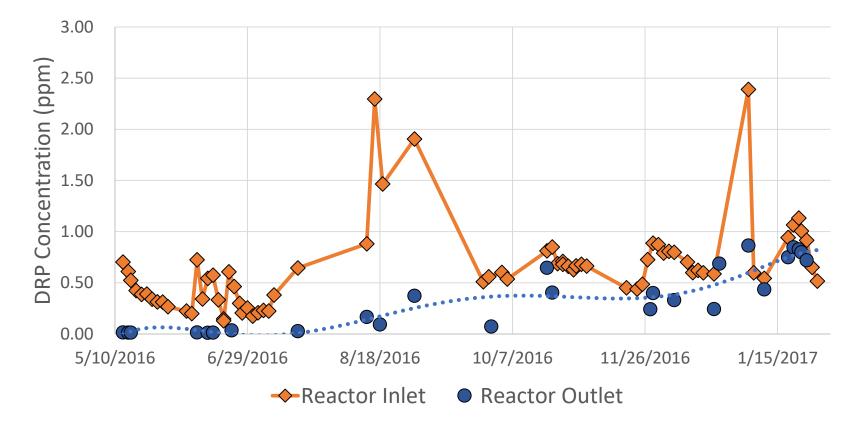




Drainage Ditch Design

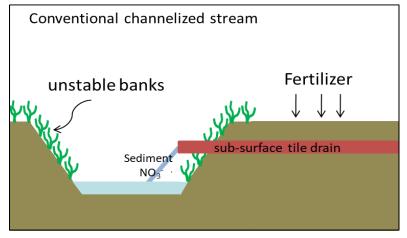



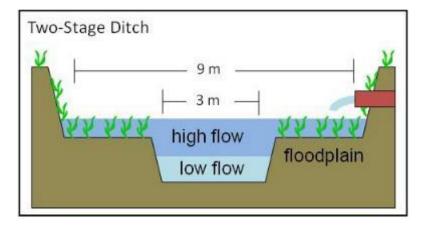




Source: Hanrahan 2017

Directionally Correct Practices

 4Rs of nutrient management (Right source, rate, time, placement)

 Disconnecting hydrologic pathways (DWM, blind inlets, linear wetlands, water storage/increased OM)




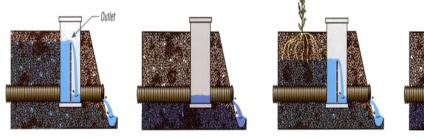


 Do not increase erosion potential (subsurface placement)





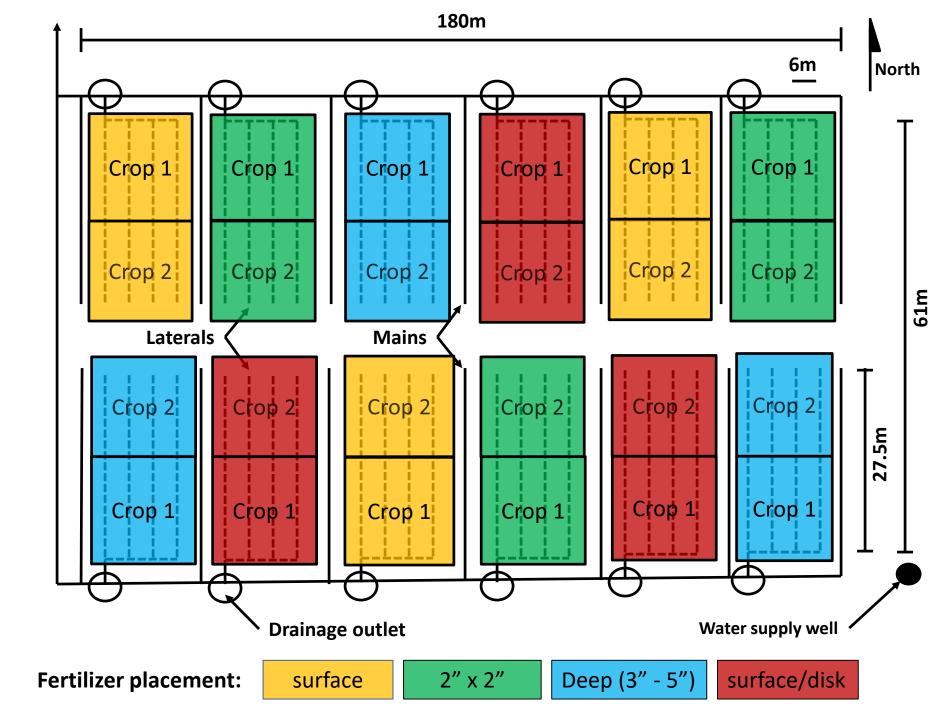

Results of Thermal Infrared Drone Survey Conducted Near Spencer, Iowa.

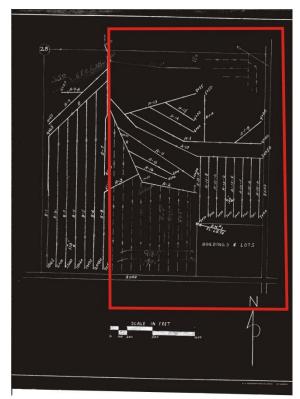

As-Built Map of Field Subsurface Drainage System. Boundary of Drone Survey is Highlighted in Red.



Field Thermal Infrared Orthomosaic from One Day <u>Before</u> 3" Rainfall Exhibiting no Drainage Pipe Responses.



Field Thermal Infrared Orthomosaic from One Day <u>After</u> 3" Rainfall Showing Drainage Pipe Patterns. (Compare to As-Built Drainage Map.)

Contact Information


Kevin King 590 Woody Hayes Dr. Columbus, OH 43210

kevin.king@ars.usda.gov






Combined Determination of Total P and Total N Using Persulfate Oxidation

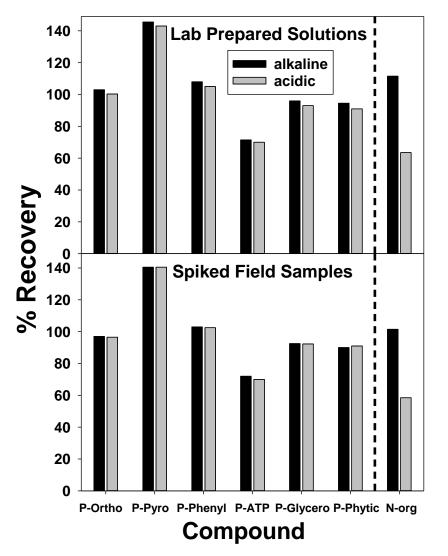

- ✓ Combined TP and TN determination is required due to number of samples (10,000+ annually)
- ✓ USGS method is valid and acceptable method Patton and Kryskalla (2003)
- Recovery of total-P is nearly identical in both the alkaline and acidic persulfate oxidation methods
- ✓ Excluding P-Pyro and P-ATP, which had bad recoveries for both alkaline and acid methods, total P recoveries ranged from 94% to 108% in lab prepared solutions and 90% to 104% in unfiltered field samples.
- However, recovery of total-N is significantly lower in the acidic method
- ✓ USGS method in use since WY2015 (Oct 1, 2014):
 > 70% of site yrs and > 77% of all water samples to date (9/30/2017)

Observed Total Suspended Solids in EOF

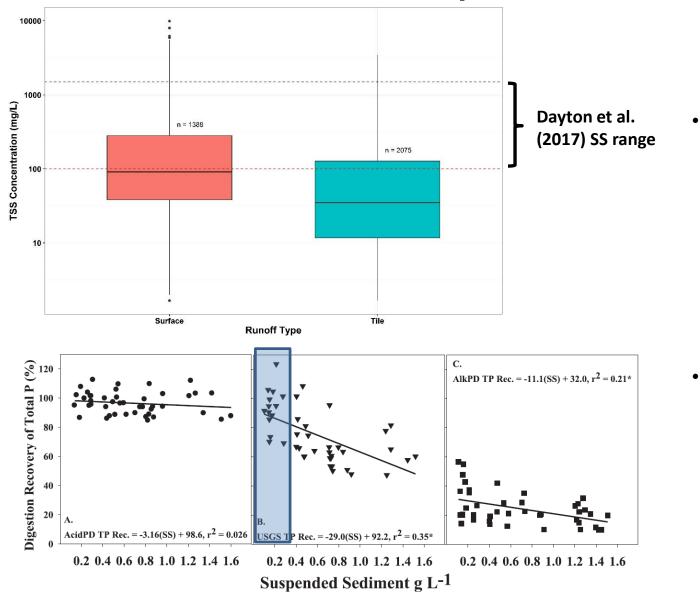

- Minimum SS in Dayton et al (2017) is greater than 50th percentile for observed surface samples and 70th percentile for tile samples
- Shaded area is typical sediment concentration range for monitored fields (75th percentile for surface and ~90th percentile for tile)